


## C1 & C1 M - Cabinet Lock

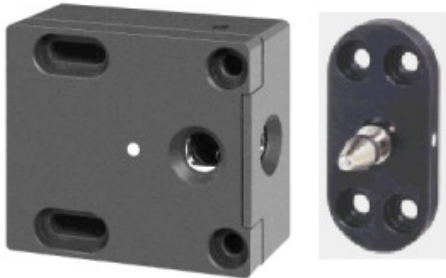

### Description

Cabinet Lock for Cupboards, display units and various other draw or file units with controlled locking requirements.

Available in monitored and unmonitored versions.

### Technical Information

Model	C1	C1 M
Standard Operating Voltage	12V DC	12V DC
Current Consumption @ 12V	350mA (+/- 2.5%@13.5v)	350mA (+/- 2.5%@13.5v)
Tolerance	+/- 1V	+/- 1V
Dimensions (L x H x D) mm	55 x 55 x 25	55 x 55 x 25
Keep	Steel Alloy. Self Locking	Steel Alloy. Self Locking
Installation	Easy-side or face fixing	Easy-side or face fixing
Strike Case	Kevlar	Kevlar
Handed	Non-handed	Non-handed
Fail Safe or Fail Secure	Fail Secure	Fail Secure
Different Version available	Yes	Yes
Moving Parts	Self lubricating	Self lubricating
Maintenance	Minimum	Minimum
Fitting	Surface Mount	Surface Mount
Monitoring	No	Yes

### Technical Drawing

